




DIN 1024

DIN Rail USB to DMX Stand Alone interface

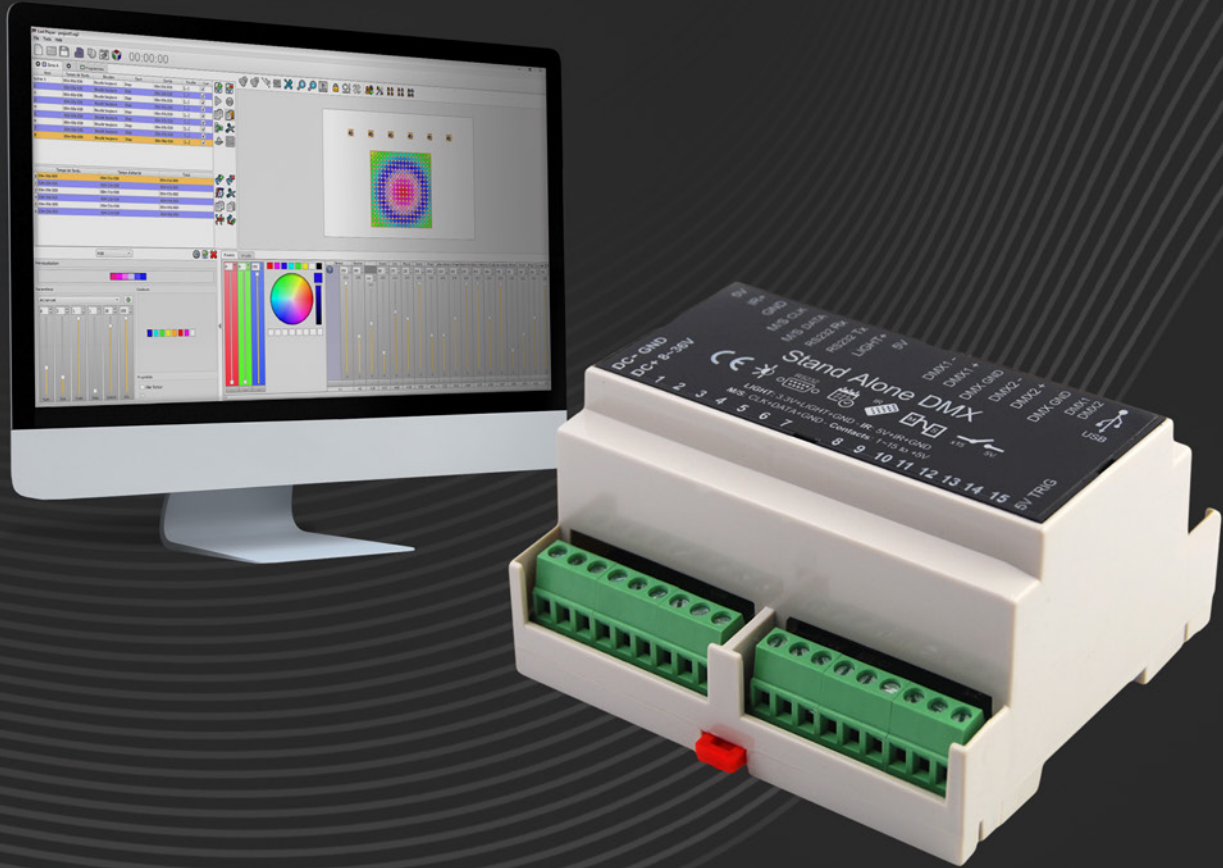

DIN 1024 is the ideal DMX stand alone interface for installation in electrical DIN cabinets with DIN rails.

Featuring a robust Stand Alone mode and a wide range of trigger possibilities, this competent device is a smart solution for easy and quick architectural installations and integration projects.

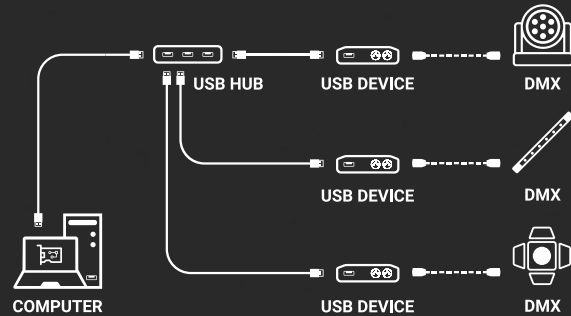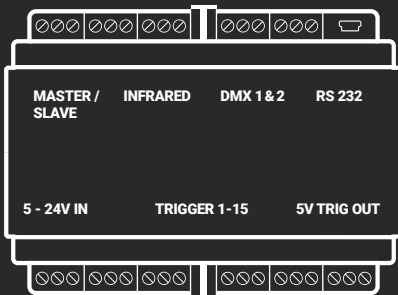


10th
YEAR
ANNIVERSARY

↓
FREE

DESIGNED & DEVELOPED
IN FRANCE

5
YEAR
WARRANTY

CHROMATEQ

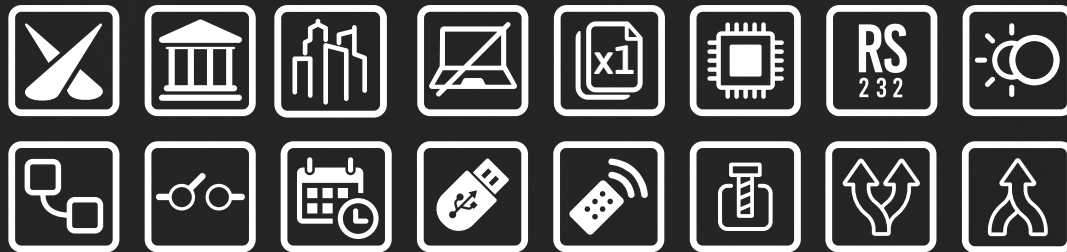

HARDWARE Options

DMX Output	2x512 In/Out channels PC and Stand Alone
Zone	1 Zone, play 1 scene/sequence at time in Stand Alone
Memory	Internal memory (No SD card required)
DMX Modes	DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger
RS232	Can receive triggers from RS232 devices (16 characters max)
Stand Alone Options	Commands from the Contacts (speed, scene, dimmer, zone) 16-bit and fine channel management Cross Fade time between scenes Automatic Scene Recovery if the power is cut off Master/Slave mode with up to 32 devices combined and synchronized (64 universes)
Triggers	Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year) 15 Dry Contacts on 3~5V (On, On/Off, Release, Restart, Scene Priority) Can receive RS232 trigger commands in Live and Stand Alone (16 characters max) Infrared Remote, Light intensity (with optional deported PCB and remote)
Max DMX outputs (USB)	x12 USB interfaces connected = 24 DMX max
Power	DC Power input of 5V to 24V
Dimension	H: 107 mm, W: 96 mm, D: 59 mm (pcb: 102/86/19)
Housing	Standard DIN-RAIL form factor (universal DIN cabinet compatibility)
I/O Connectors	Mini USB 2.0, Screw terminal block 3x9 + 6 pins
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	5 years



SOFTWARE Options

LED Player	Up to 64x512 DMX Outputs
Pro DMX	30 minutes Audio and Video Timeline
Studio DMX	3D viewer in real time (Full mode)
Wi-Light 2 APP	Mobile software control (Android, iOS)
Art-Net Output from PC	1x512 DMX Outputs per connected device
System Compatibility	Windows, iOS, Linux
Technical support	Worldwide, English, French, Chinese

FREE SOFTWARE
Download and Update



2010 - 2021 Chromateq SARL
Chromateq - All rights reserved

191 Allée de Lauzard
34980 St Gély du Fesc, FRANCE
Web: www.chromateq.com
Email: info@chromateq.com
Phone: +33 952210755
Wechat: Chromateq
WhatsApp: +8613422062209
QQ: 2908265661

Software & App download:

Software package download: <https://www.chromateq.com>
Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>
Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

PC minimum configuration:
Windows / Mac OS / Linux (Device)
2Ghz CPU, 8 Gb RAM
2Gb RAM graphic card
500 Mb disk
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)



www.chromateq.com
Contact • Support • Download