

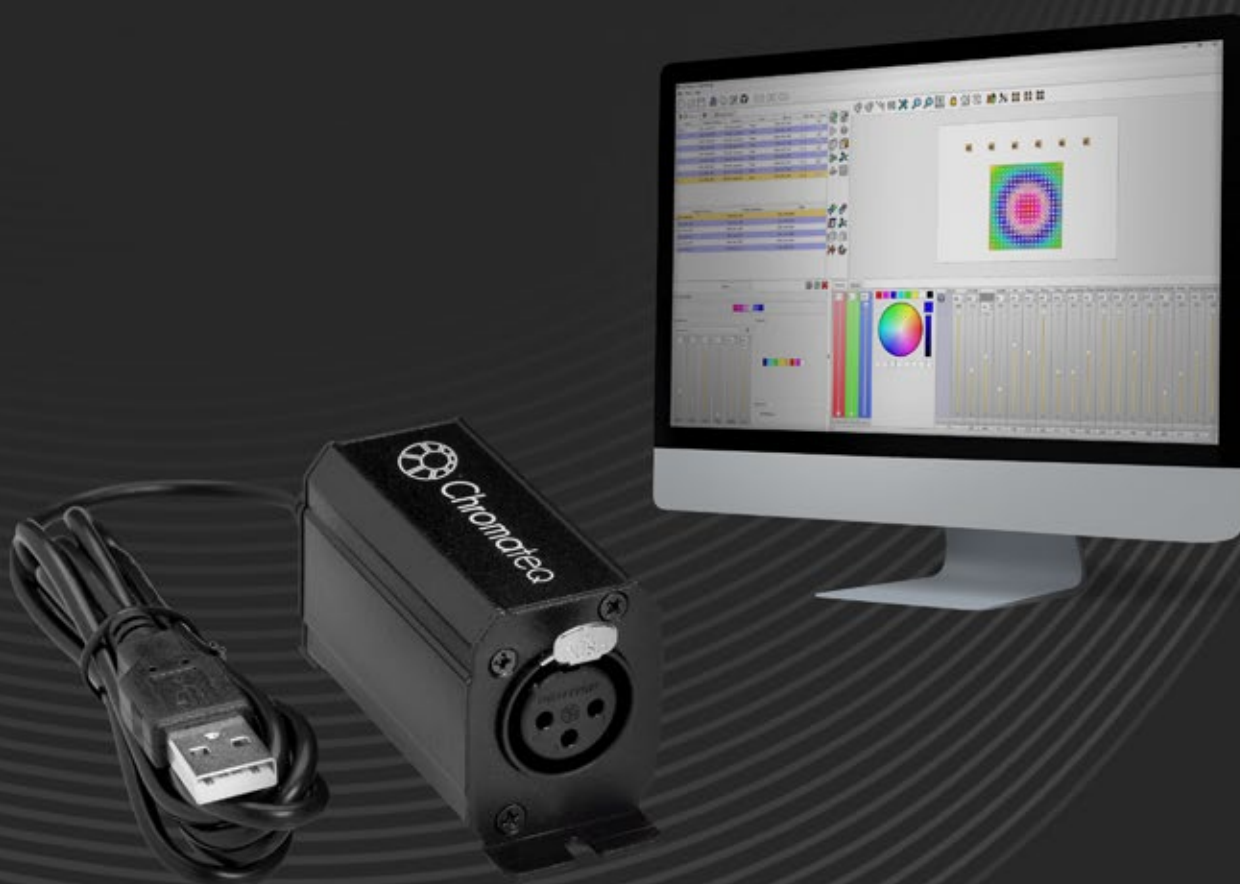


LP 512 ECO

USB to DMX interface

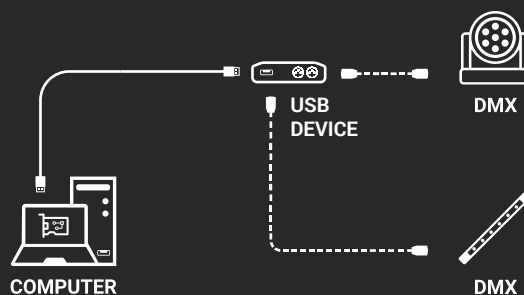

A professional package for entry-level budgets and users seeking an easy-to-operate DMX control system. Compatible with the LED Player and Pro DMX software (in limited mode), this USB to DMX controller is ideal for DJs, modest budgets, small projects, testing and troubleshooting, or as a promotional package.



10th
YEAR
ANNIVERSARY

↓
FREE

DESIGNED & DEVELOPED
IN FRANCE

3
YEAR
WARRANTY

 **CHROMATEQ**



HARDWARE Options

DMX Output	512 In/Out channels PC and 512 Out Stand Alone
Zone	1 Zone, play 1 scene/sequence at time in Stand Alone
Memory	Internal memory (40 KB, 300 to 10 DMX step capacity)
Triggers (Stand Alone)	16-bit and fine channel management Cross Fade time between scenes Default start scene when power up
Power	5V DC (USB) - 0.1A, 0.2W, High Voltage Protection
Dimension	H : 40mm(1.57in) / W : 31mm(1.22in) / D : 75mm (2.96in)
Housing	Strong Aluminum
I/O Connectors	Mini USB 2.0, 3 pin XLR (XLR5 optional)
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	1 year



SOFTWARE Options

LED Player	Up to 64x512 DMX Outputs
Pro DMX	256 DMX Outputs, No Timeline
Studio DMX	3D viewer in real time (Full mode)
Wi-Light 2 APP	Mobile software control (Android, iOS)
Art-Net Output from PC	1x512 DMX Outputs per connected device
System Compatibility	Windows, iOS, Linux
Technical support	Worldwide, English, French, Chinese

FREE SOFTWARE
Download



2010 - 2021 Chromateq SARL
Chromateq - All rights reserved

191 Allée de Lauzard
34980 St Gély du Fesc, FRANCE
Web: www.chromateq.com
Email: info@chromateq.com
Phone: +33 952210755
Wechat: Chromateq
WhatsApp: +8613422062209

Software & App download:

Software package download: <https://www.chromateq.com>
Wi Light 2 app download (iOS): <https://apps.apple.com/us/app/wi-light-2/id1523046687?l=fr>
Wi Light 2 app download (Android): <https://play.google.com/store/apps/details?id=com.chromateq.wilight2>

PC minimum configuration:
Windows, Mac OS, Linux (32 and 64 bits)
2Ghz CPU, 8 Gb RAM
2Gb RAM graphic card (for 3D)
4 Gb RAM, 600 Mb disk
1 USB port (Device)
1 Ethernet Port (for Art-Net & sACN)



www.chromateq.com
Contact • Support • Download