


## Table of contents

Fixture viewer window.....	2
Select fixtures .....	3
Move fixtures .....	3
Modify fixtures appearance .....	3
Set a options .....	3
Modify fixture ID and DMX address .....	4
Isolate fixtures in a tab.....	4
Subgroup window .....	5


# Lighting fixture management

Once you've patched your fixtures, organize them in the viewing window. Create fixture group tabs and defined selections, to make it easy to create your show.

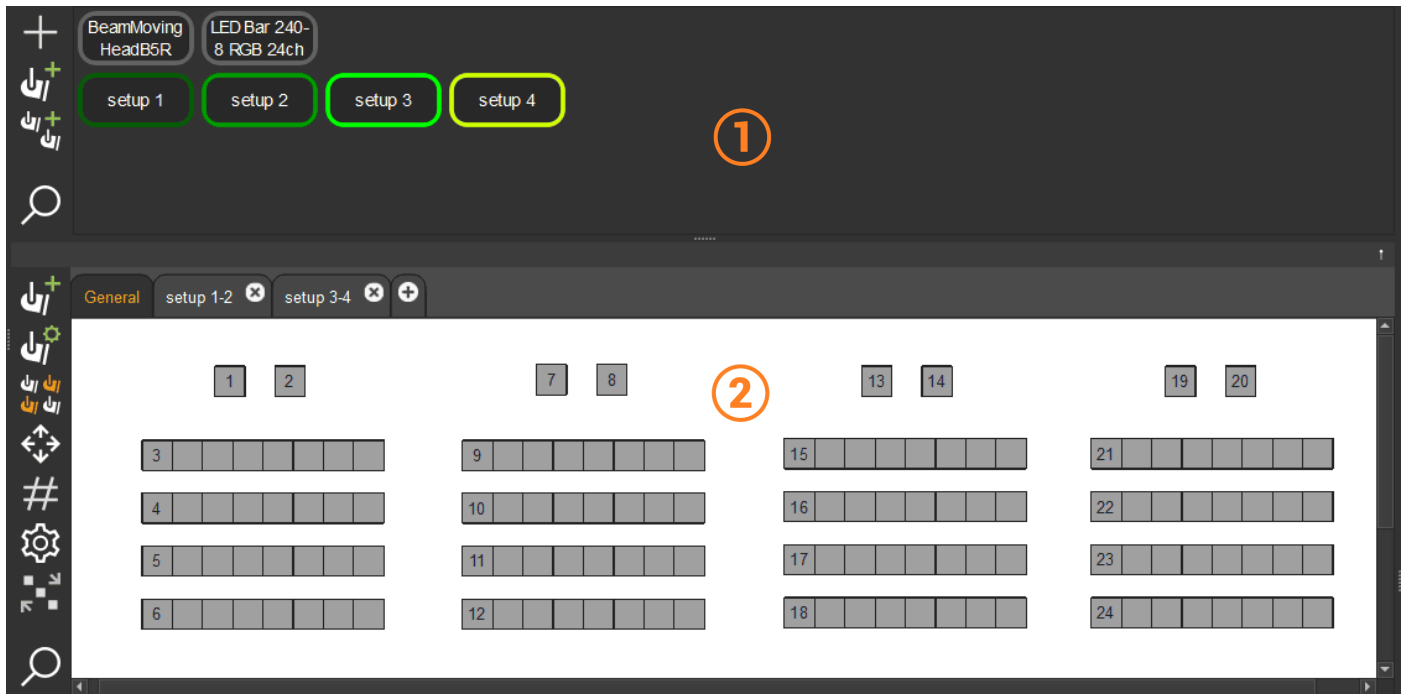

- 1- Subgroup window
- 2- Fixture viewer window

## Fixture viewer window

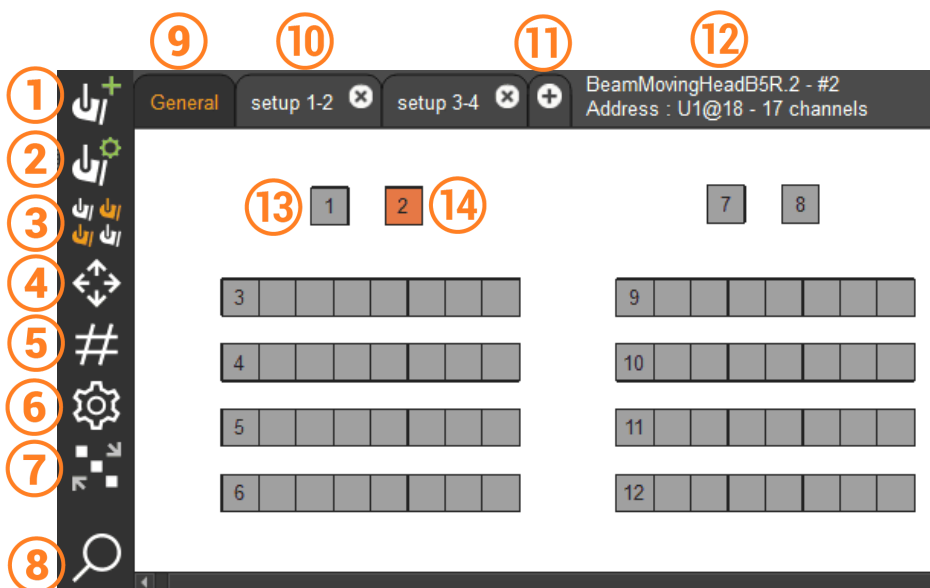


- 1- DMX Patch window
- 2- Profile editor
- 3- Quick selection tool
- 4- Moving tool
- 5- Fixture appearance
- 6- current tab option
- 7- ID assignment tool
- 8- Zoom
- 9- General tab
- 10- Isolated group tab
- 11- Add tab
- 12- Selected fixture details : name, ID, start address, channels number
- 13- Fixture
- 14- Selected fixture

## Select fixtures

Click on a fixture to display its presets at the bottom of the screen.


To select several fixtures at once, use quick selection tool

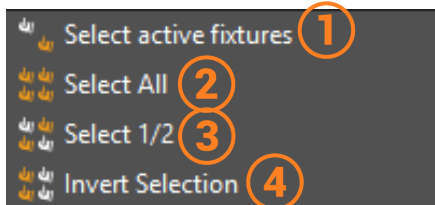

- 1- Select fixtures that send DMX data
- 2- Select all fixtures in the window
- 3- Select every second fixture
- 4- Select the opposite of your current selection

## Move fixtures


To move selected fixtures, press the shift key while moving your mouse or use moving tool

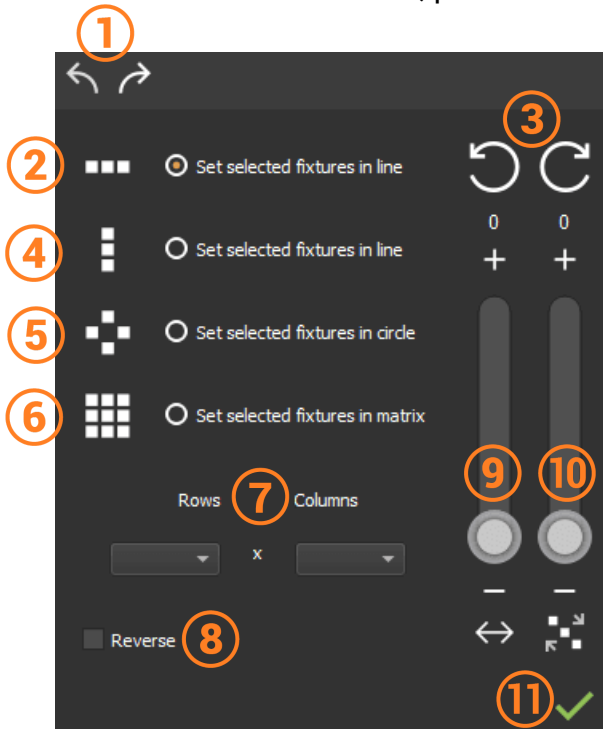


- 1- Undo/Redo
- 2- Horizontal alignment of selected fixtures
- 3- Counter-clockwise rotation/clockwise rotation
- 4- Vertical alignment of selected fixtures
- 5- Circular position of selected devices
- 6- Matrix position of selected devices
- 7- row and column division of the matrix
- 8- Reverse ID order
- 9- Space cursor
- 10- ID reorder cursor
- 11- Confirm layout


## Modify fixtures appearance

Select fixtures to modify their appearance. The toolbar icon corresponds to the appearance type.

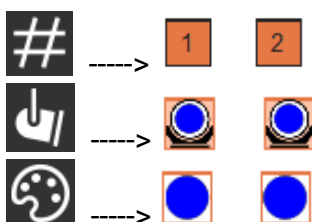


## Set a tab options

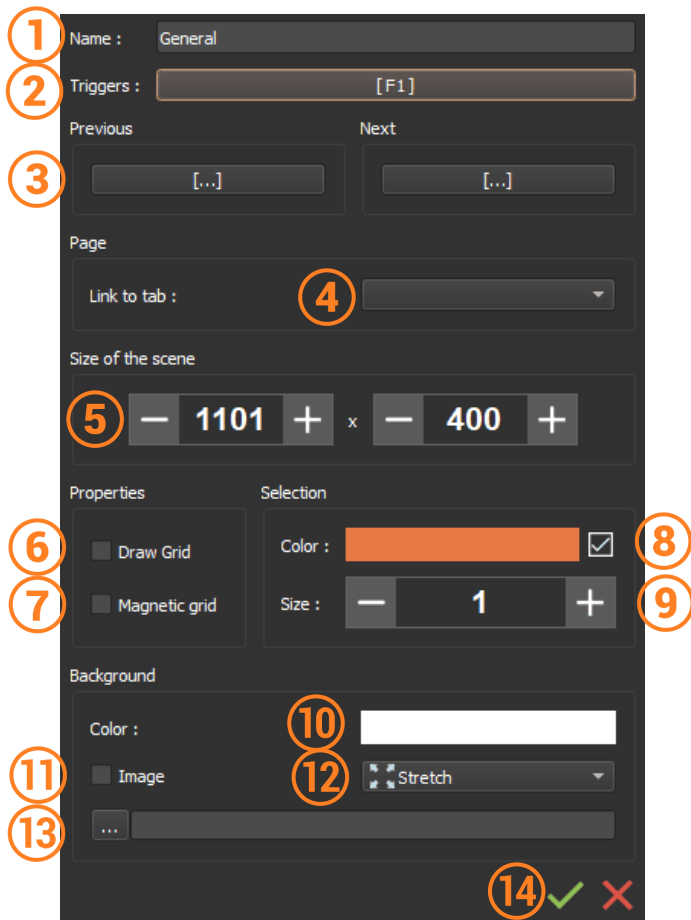

Click on the icon  to access the option window or double-click on the tab name.

- 1- Tab name
- 2- Set tab selection trigger
- 3- Set previous/next fixture selection trigger
- 4- Link fixture tab with a scene tab
- 5- Set the size of fixtures viewer area in pixels
- 6- Grid display
- 7- Enables grid magnetism
- 8- selection color
- 9- Set the selection outline size
- 10- Set background color
- 11- Display/hide selected picture
- 12- Adjust display picture
- 13- Upload background picture
- 14- Confirm your setup or quit

## Modify fixture ID and DMX address

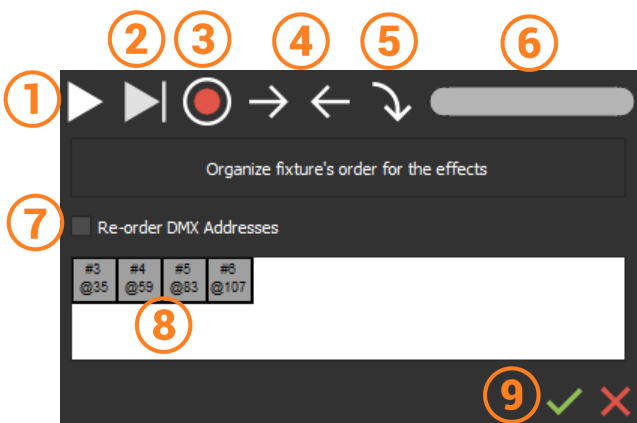

Click on the assignment ID tool 

- 1- Play scroll test by ID order
- 2- Scroll the test by ID order one by one
- 3- Record the order of IDs by device selection, then play a scroll test.
- 4- Scroll direction and ID order reverse
- 5- Apply setup on fixtures
- 6- Timeline
- 7- Reassign the DMX address according to the new ID for fixtures with the same number of channels
- 8- Click and Drag to organize selected fixtures
- 9- Confirm your setup or quit


Modify the device ID while keeping the same DMX address, or match DMX addresses with the ID order for the same fixtures.

## Isolate fixtures in a tab

Select fixtures then add tab  to isolate group of fixtures.

## Subgroup window

By default when you patch several identical fixtures, a subgroup is automatically created. Click on a subgroup button to select corresponding fixtures, in the fixtures viewer.

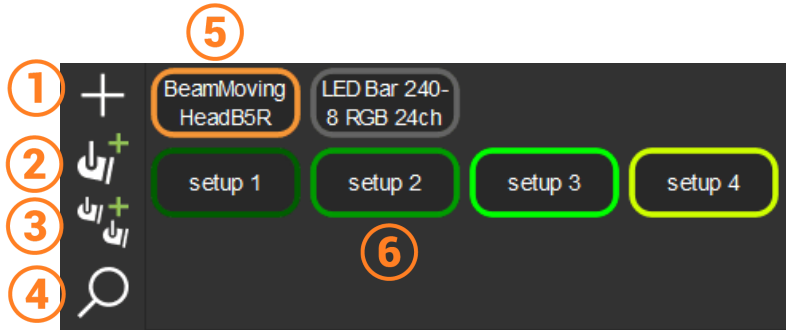

- 1- Add subgroup button corresponding to your fixtures selection
- 2- Add subgroup for each fixture
- 3- Add subgroup for each fixture family
- 4- zoom
- 5- Subgroup button
- 6- custom subgroup button